



A New Leader in Cartridge Filter Housings



Typical Applications

Liquid Filtration

100% polypropylene construction offers excellent chemical compatibility and good thermal properties. A threaded closure and a Buna N O-ring provides a leak proof seal.

Maximum Temperature: 180° F

Maximum Operating Pressure: 150 PSI

Materials of Construction: 100% Polypropylene Shell and Head. Buna N O-Ring

Mounting Bracket: Included – 1/4" Mounting Holes


1020 South 1st Street, Suite T

LaPorte, TX 77571

Phone: 713-459-0529 • Fax: 281-842-9273


E-mail: dynastyfiltration@yahoo.com

Dimensions

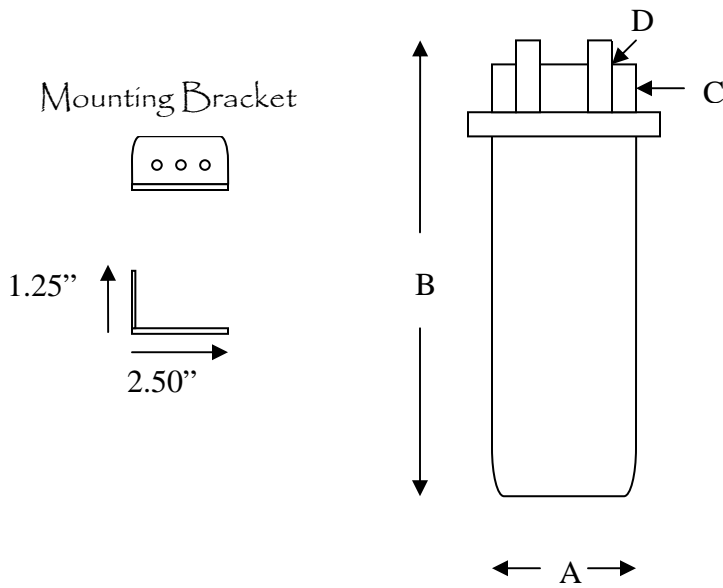

Model	A	B	C	D (Air Vent)	Weight
DF-FH-6-1-1	4.00"	12.31"	3/4" NPT	1/8"	2 LBS

Selection Guide

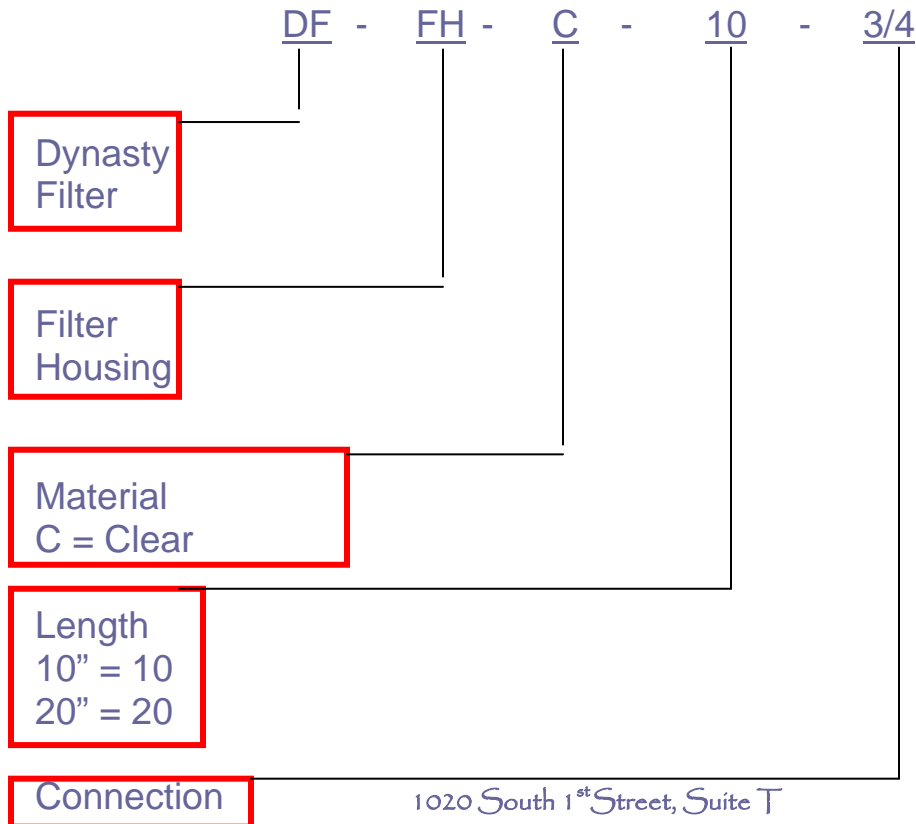

1020 South 1st Street, Suite T
 LaPorte, TX 77571
 Phone: 713-459-0529 • Fax: 281-842-9273