



## A New Leader in Cartridge Filter Housings



### Typical Applications

#### **Liquid Filtration**

100% polypropylene construction offers excellent chemical compatibility and good thermal properties. A threaded closure and a Buna N O-ring provides a leak proof seal.

Maximum Temperature: 180° F

Maximum Operating Pressure: 150 PSI

Materials of Construction: 100% Polypropylene Shell and Head. Buna N O-Ring

Mounting Bracket: Included – 1/4" Mounting Holes


1020 South 1<sup>st</sup> Street, Suite T

LaPorte, TX 77571

Phone: 713-459-0529 • Fax: 281-842-9273


E-mail: [dynastyfiltration@yahoo.com](mailto:dynastyfiltration@yahoo.com)

## Dimensions

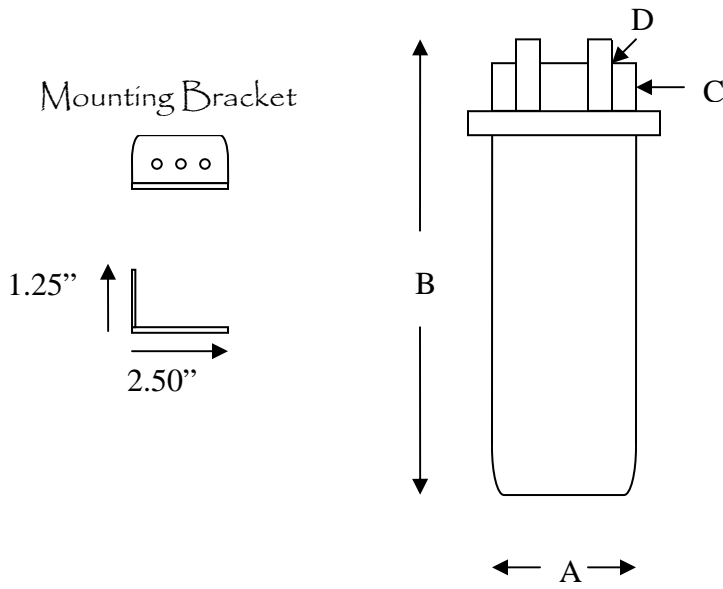

Model	A	B	C	D (Air Vent)	Weight
DF-FH-P-10-3/4	4.00"	12.31"	3/4" NPT	1/8"	2 LBS
DF-FH-P-20-3/4	4.00"	22.25"	3/4" NPT	1/8"	5 LBS

## Selection Guide

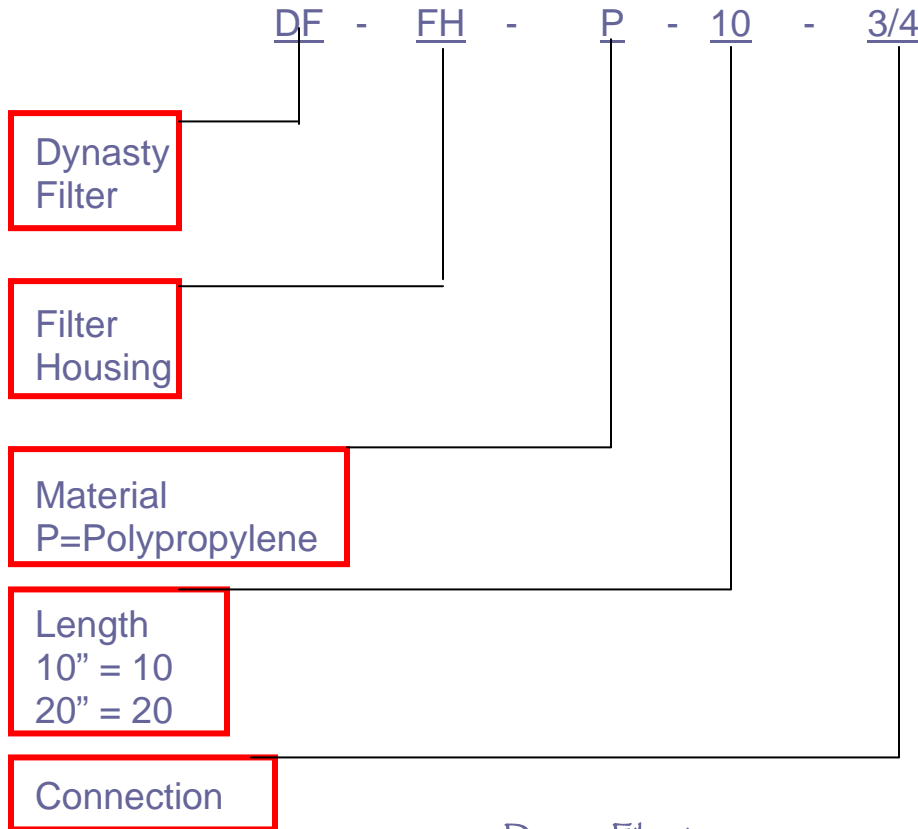

Dynasty Filtration  
 1020 South 1<sup>st</sup> Street, Suite T  
 LaPorte, TX 77571  
 Phone: 713-459-0529 • Fax: 281-842-9273