



A New Leader in Cartridge Filter Housings



Typical Applications

Liquid Filtration Gas Filtration

100% 316 stainless steel construction offers excellent chemical compatibility and good thermal properties. A swing bolt closure and a Viton O – ring provides a leak proof seal.

Maximum Temperature: 400° F


Maximum Operating Pressure: 150 PSI

Materials of Construction: 100% 316 SS Shell and Head. Viton O - Ring
Leg Stands

1020 South 1st Street, Suite T
LaPorte, TX 77571

Phone: 713-459-0529 • Fax: 281-842-9273

E-mail: dynastyfiltration@yahoo.com

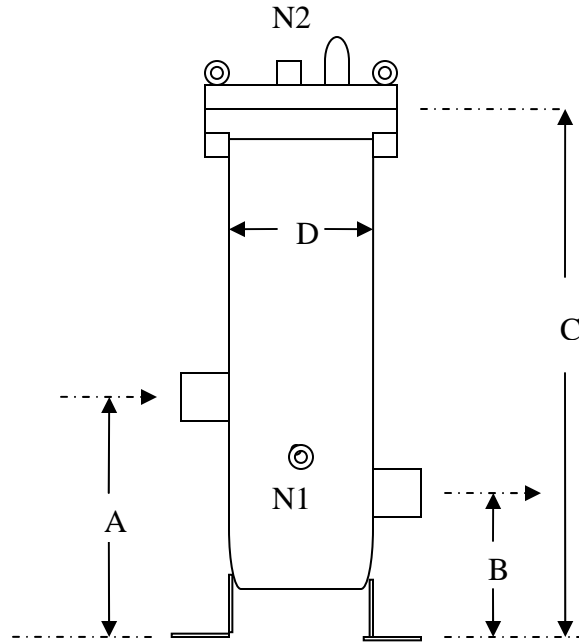

Model	A	B	C	D	N1	N2
DF-FH-316-30-2	11.0"	4.72"	72.7"	9"	3/4"	1/4"
DF-FH-316-40-2	11.0"	4.72"	52.75"	9"	3/4"	1/4"

Selection Guide

