



**Dynasty Filtration**

## Single Cartridge Filter Housings



### Typical Applications

**Gas Filtration**  
**Liquid Filtration**

304 or 316 stainless steel construction offers excellent chemical compatibility and good thermal properties. A threaded closure and a Viton O – ring provides a leak proof seal.

Maximum Temperature: 400° F

Maximum Operating Pressure: 300 PSI

Materials of Construction: 304 SS or 316 SS Shell and Head. Viton O - Ring

Mounting Bracket: Included – 1/4" Mounting Holes


123 South 16<sup>th</sup> Street

LaPorte, TX 77571

Phone: 713-459-0529 • Fax: 281-842-9273


E-mail: [dynastyfiltration@yahoo.com](mailto:dynastyfiltration@yahoo.com)

## Dimensions

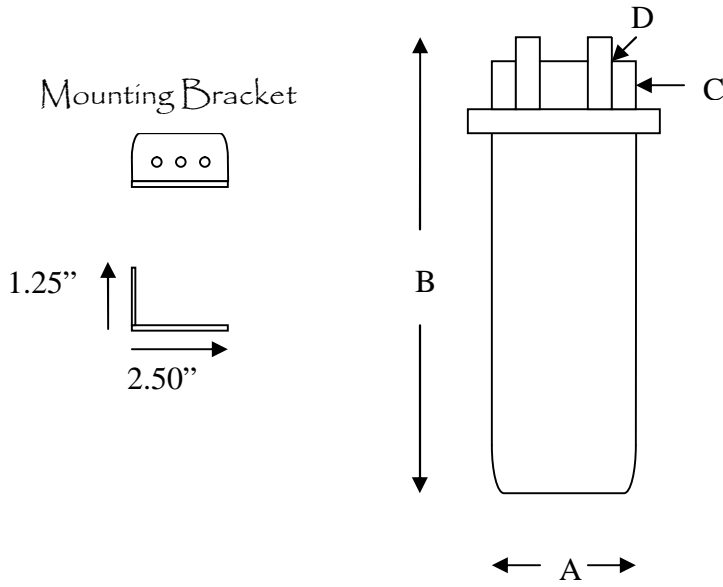

Model	A	B	C	D (Air Vent)	Weight
DF-FH-X-10-3/4	3.50"	12.68"	3/4" NPT	1/8" NPT	4 LBS
DF-FH-X-20-3/4	3.50"	24.00"	3/4" NPT	1/8" NPT	5 LBS

## Selection Guide

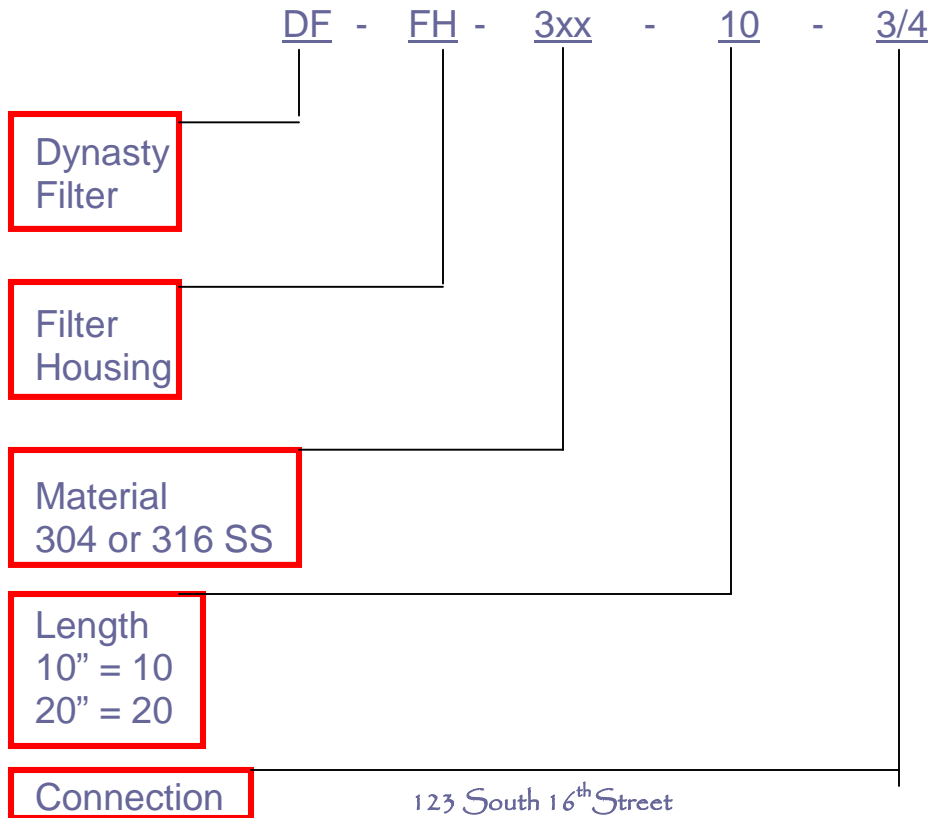

123 South 16<sup>th</sup> Street  
 LaPorte, TX 77571  
 Phone: 713-459-0529 • Fax: 281-842-9273